




## CRF200FR LMR-200-FR Equivalent

Rev 000

<b>Electrical</b>	
Impedance	50 Ohms
Velocity of Propagation	85%
Shield Effectiveness(> dB)	90
<b>Mechanical</b>	
Operating Temperature	-40°C to +85°C
Bend Radius(Install)	0.50" Min
Bend Radius(Repeated)	1.00" Min
<b>Construction</b>	
1. Inner Conductor	Bare Copper
2. Dielectric	Foam PE
3. Outer Conductor	Aluminum Foil + Tinned Copper Braid
4. Jacket	PE(UL CMR Rated)
ROHS Compliant	

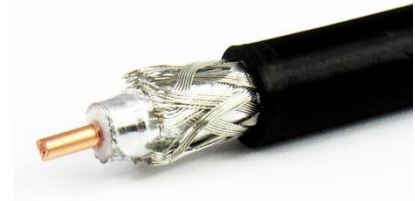

Frequency(Mhz)	150	900	1500	1800	2500
Attenuation dB/100 ft	3.79	9.69	12.99	14.39	17.49
Avg Power kW	0.40	0.16	0.12	0.11	0.10

