



CS2080SB SMA 2-Way Power Divider 2-8 GHZ

Rev 000

Electrical

Frequency	2-8 GHZ
VSWR	1.25(Input) 1.20(Output)
Impedance	50 Ohms
Insertion Loss	0.6 dB(Excluding theoretical 3.0 dB)
Isolation	20 dB
Amplitude Balance	± 0.20 dB
Phase Balance	$\pm 3^\circ$
Power Handling	30 Watts Average

Mechanical

SMA Interface per	MIL-STD-348B
Operating Temperature	-45°C to +85°C


Materials

Body(Connectors)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 30 μ " Min
Dielectric	PTFE

ROHS Compliant



Outline

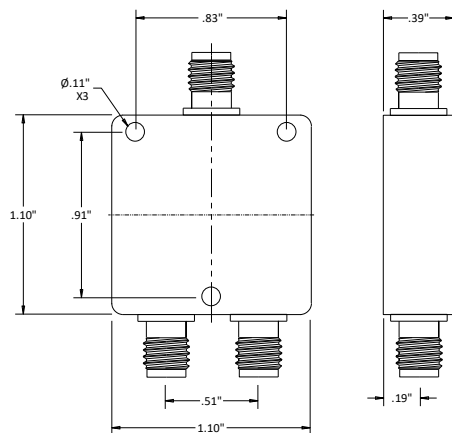

Typical Data

