




CWR159NB N/Female to WR159 Coaxial to Waveguide Adapter 4.64-7.05 GHZ

Rev 000

Electrical	
Frequency	4.64-7.05GHZ
VSWR	1.20
Impedance	50 Ohms
Mechanical	
N Interface per	MIL-STD-348B
Materials	
Body	Al
Body(N)	Passivated Stainless Steel
Contact	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

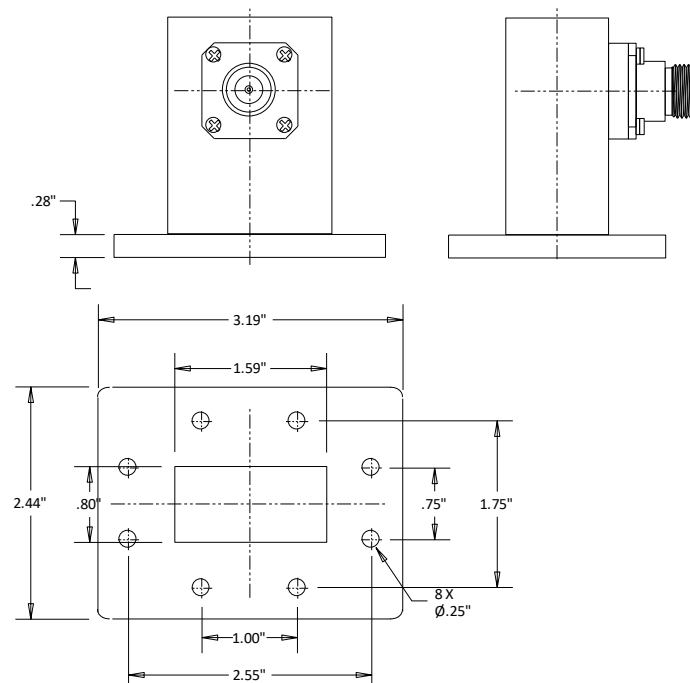

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005