
CWR2224D 2.4/Female to WR22 Coaxial to Waveguide Adapter 33-50 GHZ

Rev 000

Electrical	
Frequency	33-50 GHZ
VSWR	1.25
Theoretical Insertion Loss	0.3 Max
Impedance	50 Ohms
Mechanical	
2.4 Interface per	MIL-STD-348B
Materials	
Body	Au Plated Copper
Body(2.4)	Passivated Stainless Steel
Contact	BeCu
Contact Plating	Au 50µ" Min
ROHS Compliant	



Outline

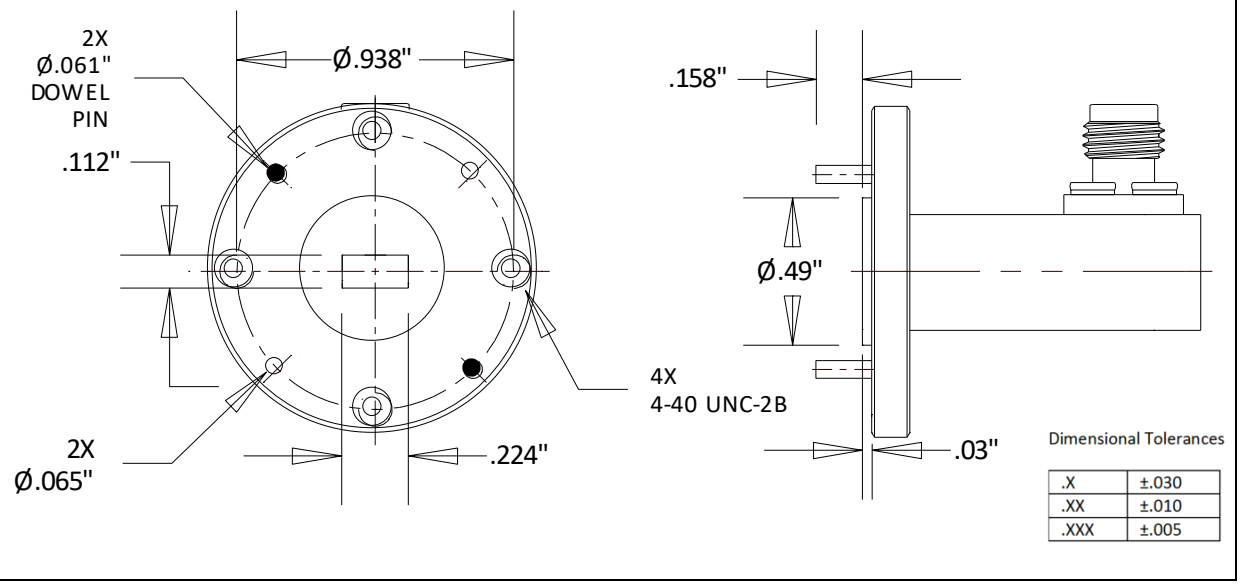

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com