




CWR62SF SMA/Female to WR62 Coaxial to Waveguide Adapter 11.9-18 GHZ

Rev 000

Electrical	
Frequency	11.9-18 GHZ
VSWR	1.20
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Materials	
Body	Cu
Body(SMA)	Passivated Stainless Steel
Contact	BeCu
Contact Plating	Au 50 μ " Min
Dielectric	PTFE
ROHS Compliant	



Outline

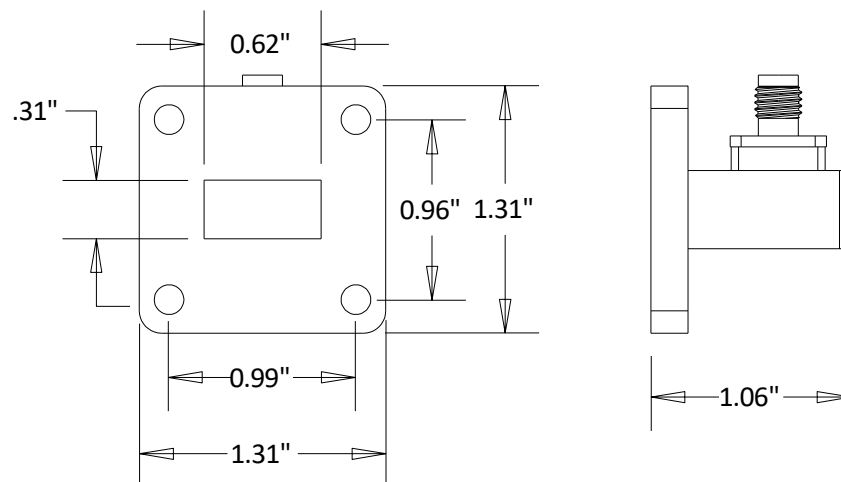

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005