




## CWR90GB SMA/Female to WR90 Grooved Flange Waveguide to Coaxial Adapter 8.2-12.4 GHz

Rev 001

<b>Electrical</b>	
Frequency	8.2-12.4 GHz
VSWR	1.20
Impedance	50 Ohms
<b>Mechanical</b>	
SMA Interface per	MIL-STD-348B
<b>Materials</b>	
Body	Al
Body(SMA)	Passivated Stainless Steel
Contact	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	

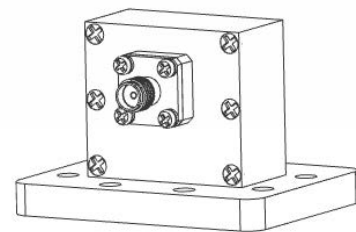

Related Links	
Typical Data	Product Page

