




CWRD250N N/Female to WRD250 Coaxial to Waveguide Adapter 2.6-7.8 GHZ

Rev 001

Electrical	
Frequency	2.6-7.8 GHZ
VSWR	1.30 Max
Impedance	50 Ohms
Mechanical	
N Interface per	MIL-STD-348B
Materials	
Body	Al
Body(N)	Passivated Stainless Steel
Contact	BeCu
Contact Plating	Au per MIL-G-45204
ROHS Compliant	



Outline

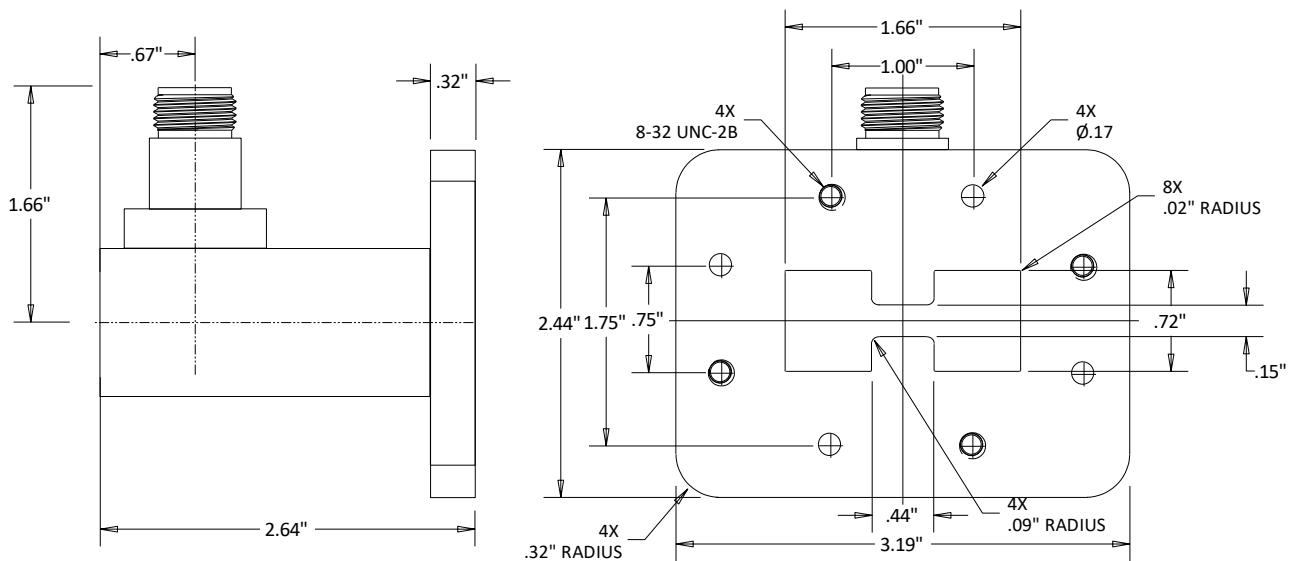

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005