




CX0861 SMA/Male Connector for RG405(.086) 27 GHZ

Rev 000


Electrical	
Frequency	0-27 GHZ
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Materials	
Body	Passivated Stainless Steel
Contacts	Brass
Contact Plating	Au Per MIL-G-45204
ROHS Compliant	



Outline

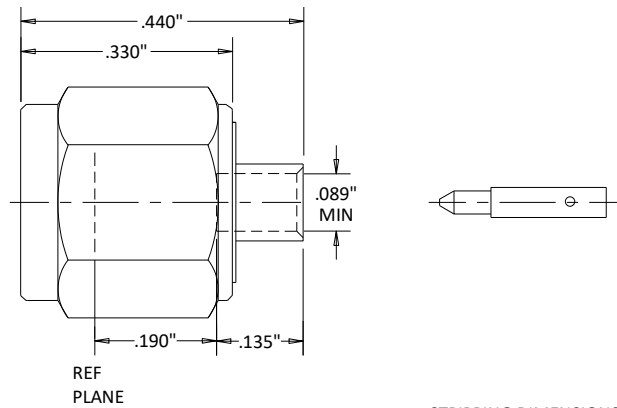

STRIPPING DIMENSIONS



Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005