



CX2401 SMA/Male Solder/Crimp Connector for LMR240

Rev 000

Electrical	
Impedance	50 Ohms
Environmental	
Operating Temperature	-45°C to +85°C
SMA Interface per	MIL-STD-348B
Materials	
Body	Passivated Stainless Steel
Contact	BeCu
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
ROHS Compliant	




Outline


FERRULE




SOLDER PIN



CONNECTOR BODY



STRIPPING DIMENSIONS

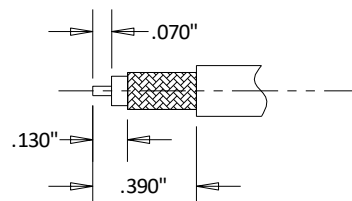

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005