




CX3207 MCX/Plug Solder/Crimp Connector for RG316DS

Rev 000


| | |
|-----------------------|-----------------|
| Electrical | |
| Impedance | 50 Ohms |
| Environmental | |
| Operating Temperature | -55°C to +125°C |
| Materials | |
| Body | Au Plated Brass |
| Contact | Brass |
| Contact Plating | 30μ" Min |
| Dielectric | PTFE |
| ROHS Compliant | |



Outline

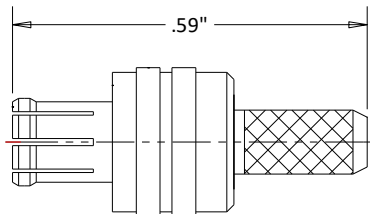

STRIPPING DIMENSIONS

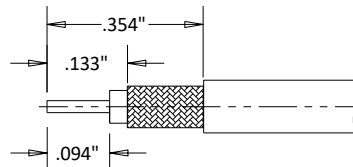

Dimensional Tolerances

| | |
|------|-------|
| .X | ±.030 |
| .XX | ±.010 |
| .XXX | ±.005 |